


EKOKAT FUGA NRM

Joint Filler

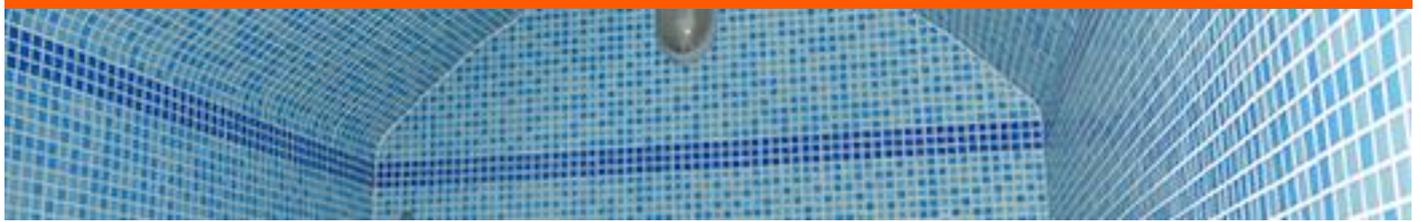

DESCRIPTION

The product is a cement-based ceramic and tile joint filler that contains mineral aggregates of a special particle size and chemical additives enhancing product performance.

It conforms to TS EN 13888 and CG1 standards.

CG: Cement-based joint fillers, 1: Standard hardening

TECHNICAL SPECIFICATIONS

Appearance	White
Mixing Ratio	6-6,5 liters of water/ 20 kg
Amount of Consumption	0.5-1,0 kg /m ²
Application Temperature	+5 °C to +35 °C
Processing Time	35-40 minutes
Time Until Complete Freezing	21 days
Time before Availability	24 hours
Toxicity	Non-toxic
Bending Strength	2.5 N/mm ²
Compression Strength	15 N/ mm ³
Wear Resistance	2000 mm ³
Contraction	2 mm/m
Water Absorption	5 gr in 30 min – 10 gr in 240 min

Date: 02.03.2017 Revision: 00

ÇULLAS YAPI MALZEMELERİ SANAYİ ve DIŞ TİCARET A.Ş.
Çoraklar Mahallesi 5024 Sokak No:10 Aliğa Organize Sanayi Bölgesi - Aliğa / İzmir
TURKEY
T. +90 216 457 80 10 F. +90 216 457 82 60
info@ekokat.com www.ekokat.com



EKOKAT FUGA NRM

Joint Filler

AREAS OF USE

It is used to fill joints of ceramic and tile materials that are applied to existing surfaces. It can be safely applied in vertical and horizontal applications in the interior of all buildings.

BENEFITS

It is easy to prepare and apply. It is resistant to abrasion and fading. It provides a non-cracking and smooth surface. It gives proper working time. It does not lead to drift at vertical applications. It has high adhesion properties. It does not scratch glazed surfaces. It provides perfect adhesion without cracking on ceramic edges.

INSTRUCTIONS FOR USE

Residues that will prevent adhesion on the surface should be cleaned. 20 kg EKOKAT FUGA NRM is slowly poured into 6-6.5 liters of water and is then mixed with a low speed (400-600 rpm) mixer. The homogenous mortar is allowed to rest for 5 minutes and then mixed again once before application. The prepared mixture is spread on the ceramics with a rubber trowel and the joint is then filled. Excess material is removed with diagonal movements. The material is allowed to rest until it withstands finger pressure, and the entire surface is cleaned with a damp sponge to provide necessary moisture to complete the hydration. The residual joint filler remaining on the ceramic is cleaned with a damp sponge. And the joints are given the final shape.

PACKAGING

20 kg craft bags (PE reinforced)

80 shrink bags on one palette (110x110 cm).

STORAGE CONDITIONS AND SHELF LIFE

No more than two palettes should be placed on top of each other in their unopened original packaging, in a cool and dry environment. Shelf life is 12 months from date of production under suitable storage conditions.

SAFETY MEASURES

Work clothes, protective gloves, goggles, and masks suitable for workers health and safety should be used during the application. Due to irritant effects of uncured material, it should be washed with plenty of water and soap immediately in case of contact with skin and eyes. If swallowed, seek medical advice immediately. No food and drink should be brought into application areas. Store it out of reach of children. Please refer to the safety data sheet for further information.

RESPONSIBILITY

Our Company may not be held liable for any application errors that might be suffered if the product is not used for its intended purposes, or if it is failed to conform to the conditions and proposals specified above regarding technical application. This technical data sheet contains information that is current as of the date of issuance hereof. The manufacturer hereby reserves its right to change this data sheet at any time.

||||| EK 2001.020.20  White

||||| EK 2001.010.20  Grey

Date: 02.03.2017 Revision: 00

ÇULLAS YAPI MALZEMELERİ SANAYİ ve DIŞ TİCARET A.Ş.
Çoraklar Mahallesi 5024 Sokak No:10 Aliğa Organize Sanayi Bölgesi - Aliğa / İzmir
TURKEY
T. +90 216 457 80 10 F. +90 216 457 82 60
info@ekokat.com www.ekokat.com

